
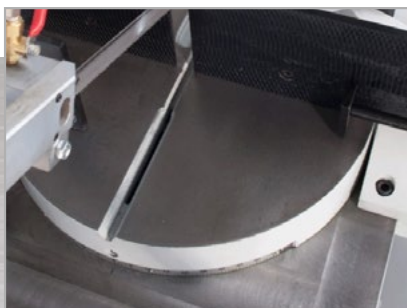



SUPER TRAD 380 MULTI MODE



 MULTI MODE						 3310x27x0,9	kW 1.5/1.8	mt/min 40/80	 340 mm	 660	OPTION
		220	300	260	180	 IMBALLO / PACKING	A = 1200 mm B = 2050 mm H = 1810 mm		 A = 1590 mm B = 2140 mm		 PNEUMATIC
		180	260	250	170						
		200x160	330x260	270x200	170x170						

Segatrice a nastro SUPER TRAD 380 MULTI MODE a tre modalità di lavoro: discesa assistita dell'arco con avvicinamento rapido della lama, discesa manuale dell'arco a velocità controllata e discesa manuale libera. Indicata per il taglio di profilati metallici e materiali pieni quali acciai da costruzione, acciai bonificati, acciai inox, alluminio e ottone. Progettata per produzioni in serie di media e grande entità e per lavorazioni di carpenteria medio-pesante. La macchina consente di effettuare il taglio **senza la costante presenza dell'operatore**, grazie al sistema idraulico di controllo della discesa dell'arco con velocità regolabile in funzione del materiale da tagliare; tramite **commutatore sul pannello di comando** è possibile passare alla modalità di taglio manuale controllata o manuale libera. Consente tagli da 0° a 60° a destra e fino a 45° a sinistra, con battute di arresto e leva di bloccaggio per il fissaggio anche ad angolazioni intermedie. L'ampio plateau girevole con **rotazione solidale dell'arco** evita il danneggiamento del piano di lavoro tipico delle segatrici tradizionali. Il **pulsante di avviamento della rotazione lama** è posizionato sulla leva di movimento arco, con **pulsante dedicato per l'avvicinamento rapido della lama al materiale**. La macchina è equipaggiata con motore trifase a due velocità di rotazione lama e **tensionamento idraulico del nastro con visualizzazione su manometro**, dotato di pressostato di sicurezza che arresta la rotazione in caso di lama non tensionata o rotta. La morsa in ghisa montata su rotaia con avvicinamento rapido e bloccaggio a leva, dotata di ganasce zigrinate in acciaio, garantisce un serraggio efficace anche nel taglio di tubi. I **blocchetti guida lama con cuscinetti e placchette in widia** assicurano precisione e stabilità durante il taglio. Dotata di **elettropompa ad alta portata per la lubrificazione**, **spazzola pulilama** per mantenere la lama pulita e prolungarne la durata e **pannello comandi ergonomico** per un utilizzo pratico e immediato. **Altezza piano di lavoro: 940 mm.**

Band saw SUPER TRAD 380 MULTI MODE featuring three operating modes: assisted bow descent with rapid blade approach, manual bow descent with controlled speed, and free manual bow descent. Designed for cutting metal profiles and solid materials such as structural steels, tempered steels, stainless steels, aluminium and brass. Ideal for **medium to large batch production** and for medium-heavy fabrication work. The machine allows cutting **without the constant presence of the operator**, thanks to the **hydraulic bow descent control system** with adjustable speed according to the material being cut; through a **selector switch on the control panel**, the machine can be set to **automatic, controlled manual or free manual mode**. It allows cuts from 0° to 60° to the right and up to 45° to the left, with preset stops and a locking lever to secure the bow at any intermediate angle. The **large rotating worktable with bow rotation system** prevents damage to the worktable surface typical of traditional band saws. The **blade start button is positioned on the bow movement lever**, with a dedicated push button for rapid blade approach to the material. The machine is equipped with a **two-speed three-phase motor** and **hydraulic blade tensioning with pressure gauge indication**, including a **safety pressure switch** that stops blade rotation in case of insufficient tension or blade breakage. The **cast iron vice mounted on a sliding rail, with quick approach handle and fast locking lever**, together with **knurled steel jaws**, ensures secure clamping even when cutting tubes. The **blade guide blocks with bearings and carbide (widia) plates** guarantee high cutting precision and stability. The machine is fitted with a **high-flow electric coolant pump for proper lubrication during cutting**, a **blade cleaning brush** to keep the blade clean and extend its service life, and an **ergonomically positioned control panel** for easy and practical operation. **Working table height: 940 mm.**