
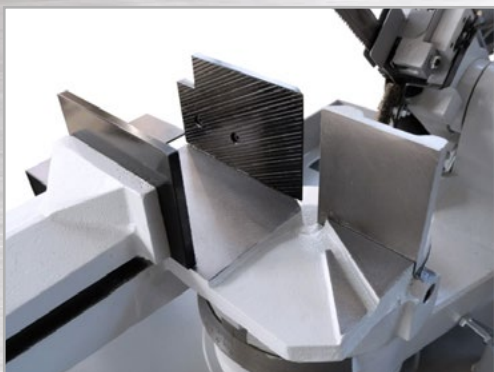


THOMAS ZIP 29



	0°	45°	60°		kW	mt/min		
				2450x27x0,9	0.55/1.1	32/64	250 mm	220
	225	140	60	 A= 680 mm B= 1400mm H= 1040 mm IMBALLO / PACKING			 A= 960 mm B= 1750 mm INGOMBRO / DIMENSIONS	
	200	140	60					
	240x140	135x150	60x85					

 Segatrice a nastro manuale **ZIP 29** per il taglio di profili metallici e materiali pieni, ideale per lavorazioni di carpenteria leggera e piccole produzioni in serie. Consente tagli **da 0° a 60° a destra** con battute di arresto e leva di bloccaggio per il fissaggio anche ad angolazioni intermedie. **Il pulsante di avviamento della lama è integrato nell'impugnatura della leva arco**, per un controllo immediato durante il taglio. La macchina è equipaggiata con **motore trifase a due velocità di rotazione lama e tensionamento meccanico del nastro tramite volantino con vite di battuta**. La morsa manuale con bloccaggio rapido a leva e ganasce zigrinate in acciaio garantisce un serraggio efficace anche nel taglio di tubi. I **blocchetti guida lama con cuscinetti e placchette in widia** assicurano precisione e stabilità durante il taglio. Dotata di **elettropompa ad alta portata per la lubrificazione, spazzola pulilama** per mantenere la lama pulita e prolungarne la durata e pannello comandi ergonomico per un utilizzo pratico e immediato. Altezza piano di lavoro: 975 mm.

 Manual band saw **ZIP 29** designed for cutting metal profiles and solid materials, ideal for light fabrication work and small batch production. It allows cuts **from 0° to 60° to the right**, with preset stops and a locking lever to secure the bow at any intermediate angle. The blade start button is integrated in the bow handle, allowing immediate control during cutting operations. The machine is equipped with a **two-speed three-phase motor and mechanical blade tensioning by means of a handwheel with stop screw**. The manual vice with quick lever locking system and knurled steel jaws ensures secure clamping of the material, even when cutting tubes. The **blade guide blocks with bearings and carbide (widia) plates** provide high cutting precision and stability. The machine is fitted with a **high-flow electric coolant pump for proper lubrication during cutting**, a **blade cleaning brush** to keep the blade clean and extend its service life, and an ergonomically positioned control panel for practical and easy operation. **Working table height: 975 mm.**